


AQ100

The Air/Q Atmospheres diffusion system uses Prolitec's patented diffusion technology to diffuse fragrance and odor remediation products into the air. This appliance was designed for both home and professional use.

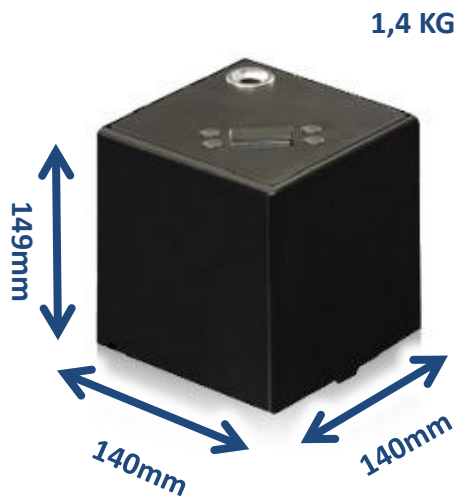

Technical specifications

Reference	Air/Q 100
Type	1 head nebulizer, recyclable cartridge
Droplet size	Typically less than one micron

Power specifications

Input	100 – 240 VAC at 0,4A
Frequency	50 / 60 Hz
Protection	Auto switch-off when knocked over
Output	15 VDC at 1A

Performance & Settings


Coverage	Up to 280 m ³ (10,000feet ³)
Programs	Start & Stop Time, 24/7 Mode
Settings	50 intensity levels
Output	Scent direction attachment

Others

Installation	Table top, free standing
Cartridge size	90ml
Material / Colors	Polyester Plastic / Black, Pearl
Safety Approval	FCC Part 15, UL Power Adapter, CE & ROHS compliant
Environment	0° to 40° Celsius / <85% Humidity

AQ150

The Air/Q Atmospheres diffusion system uses Prolitec's patented diffusion technology to diffuse fragrance and odor remediation products into the air. This appliance was designed for both home and professional use.

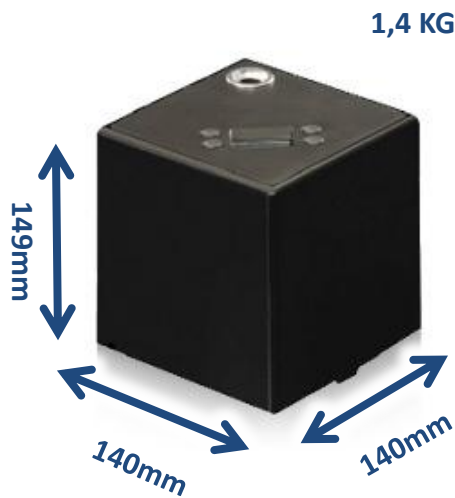

Technical specifications

Reference	Air/Q 150
Type	1 head nebulizer, recyclable cartridge
Droplet size	Typically less than one micron

Power specifications

Input	100 – 240 VAC at 0,4A
Frequency	50 / 60 Hz
Protection	Auto switch-off when knocked over
Output	15 VDC at 1A

Performance & Settings

Coverage	Up to 280 m ³ (10,000 feet ³)
Programs	Start & Stop Time, 24/7 Mode, Program Mode (up to three programs per day)
Settings	50 intensity levels
Output	Scent direction attachment


Others

Installation	Table top, free standing
Cartridge size	90ml
Material / Colors	Polyester Plastic / Black, Pearl
Safety Approval	FCC Part 15, UL Power Adapter, CE & ROHS compliant
Environment	0° to 40° Celsius / <85% Humidity

AQ550

The Air/Q Atmospheres diffusion system uses Prolitec's patented diffusion technology to diffuse fragrance and odor remediation products into the air. This appliance was designed for both whole house and professional use.

2,2 KG

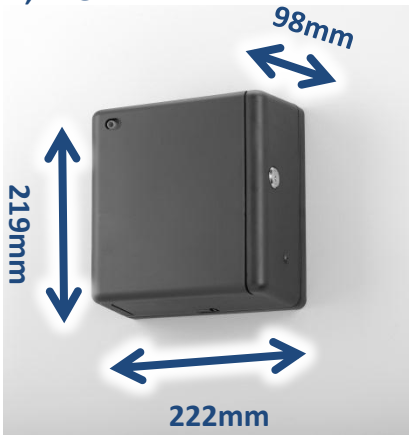

Technical specifications

Reference	Air/Q 550
Type	1 head nebulizer, recyclable cartridge
Droplet size	Typically less than one micron

Power specifications

Input	100 – 240V AC at 0,6A
Frequency	50 / 60 Hz
Protection	Switching power supply, 3V back up battery
Output	15V DC at 1,5A

Performance & Settings

Coverage	Up to 850m ³ (30,000 feet ³)
Programs	Start & Stop Time, 24/7 Mode, Program Mode, 2 or 7 minute cycles
Settings	50 intensity levels
Output	Top or front

Others

Installation	Wall-mounted
Cartridge size	265ml
Material / Colors	Polyester Plastic / Black, White
Safety Approval	FCC Part 15, UL Power Adapter, CE & ROHS compliant
Environment	0° to 40° Celsius / <85% Humidity

AQ1200

The Air/Q Atmospheres diffusion system uses Prolitec's patented diffusion technology to diffuse fragrance and odor remediation products into the air. This appliance was designed for professional use.

6,2 KG

172mm



Technical specifications

Reference	Air/Q 1200
Type	1 head nebulizer, recyclable cartridge
Droplet size	Typically less than one micron

Power specifications

Input	100 – 240V AC at 0,6A
Frequency	50 / 60 Hz
Protection	Switching power supply, 3V back up battery
Output	12V DC at 1,5A

Performance & Settings

Coverage	Up to 4,250m ³ (150,000 feet ³)
Programs	Start & Stop Time, 24/7 Mode, Program Mode, 2 or 7 minute cycles
Settings	50 intensity levels
Output	Top

Others

Installation	Output connected to HVAC duct
Cartridge size	1250ml
Material / Colors	Fibre glass, White
Safety Approval	FCC Part 15, UL Power Adapter, CE & ROHS compliant
Environment	0° to 40° Celsius / <85% Humidity